TOP LIFT

TP-LIFTING Flat Webbing Sling
0.5Ton - 50Ton

EN 1492-1 : 2000+A1:2008

www.tuv.com
ID 1000000000

Webbing sling is made of high tenacity polyester by advanced international weaving technology, equipment and various sewing methods.



According to customer's requirement, the safety factor of sling could reach 4:1 5:1 6:1 7:1 8:1. Its load ranges from 0.5T to 50T, which is produced according to international standard, for color and load capacity.







WEBBING SLING

TOP LIFT

Webbing slings


TP-LIFTING Webbing slings are made from high tenacity 100% polyester (PES) webbing material manufactured according to EN standards.

These slings have the following advantages:

- Low weight, therefore offering easy handling
- Protection against hand injuries
- Protection against cargo surface damage
- Highly flexible and adaptable to given shapes
- UV-resistant, eliminating material ageing or brittlement
- Heat resistant up to 100°C
- Water - resistant fabric, preventing frost damage (down to -40°C)
- Soft sewn eyes (Flat, Becket or Reverse eyes)
- Low elongation



Single Ply Flat Webbing Sling
0.5Ton - 6Ton





ART.NO.	W.L.L. (kg)	5:1&6:1 WIDTH (mm)	7:1&8:1 WIDTH (mm)	COLOR	WLL in kg at different modes				
					Straight lift	Basket lift	7°~45°	Choker hitch	45°~60°
TP-WS-101	500	25	30	Violet	500	1000	700	400	500
TP-WS-102	1000	50	60	Green	1000	2000	1400	800	1000
TP-WS-103	1500	75	90	Yellow	1500	3000	2100	1200	1500
TP-WS-104	2000	100	120	Grey	2000	4000	2800	1600	2000
TP-WS-105	2500	125	150	Red	2500	5000	3500	2000	2500
TP-WS-106	3000	150	180	Brown	3000	6000	4200	2400	3000
TP-WS-108	4000	200	240	Blue	4000	8000	5600	3200	4000
TP-WS-110	5000	250	300	Orange	5000	10000	7000	4000	5000
TP-WS-112	6000	300	300	Orange	6000	12000	8400	4800	6000

TOP LIFT

Double Ply Flat Webbing Sling
1Ton - 12Ton

★ Specification:
- Material:100% High tenacity industrial polyester yarn
- Ply: Double Ply
- With reinforced lifting eyes
- Length Available:1m to 12m
- Low elongation
- According to EN1492-1+A1:2008
- CE & G.S. certified





ART.NO.	W.L.L. (kg)	5:1&6:1 WIDTH (mm)	7:1&8:1 WIDTH (mm)	COLOR	WLL in kg at different modes				
					Straight lift	Basket lift	7°~45°	Choker hitch	45°~60°
TP-WS-201	1000	25	30	Violet	1000	2000	1400	800	1000
TP-WS-202	2000	50	60	Green	2000	4000	2800	1600	2000
TP-WS-203	3000	75	90	Yellow	3000	6000	4200	2400	3000
TP-WS-204	4000	100	120	Grey	4000	8000	5600	3200	4000
TP-WS-205	5000	125	150	Red	5000	10000	7000	4000	5000
TP-WS-206	6000	150	180	Brown	6000	12000	8400	4800	6000
TP-WS-208	8000	200	240	Blue	8000	16000	11200	6400	8000
TP-WS-210	10000	250	300	Orange	10000	20000	14000	8000	10000
TP-WS-212	12000	300	300	Orange	12000	24000	16800	9600	12000

Four Ply Flat Webbing Sling
2Ton - 24Ton



ART.NO.	W.L.L. (kg)	5:1&6:1 WIDTH (mm)	7:1&8:1 WIDTH (mm)	COLOR	WLL in kg at different modes				
					Straight lift	Basket lift	7°~45°	Choker hitch	45°~60°
TP-WS-401	2000	25	30	Violet	2000	4000	2800	1600	2000
TP-WS-402	4000	50	60	Green	4000	8000	5600	3200	4000
TP-WS-403	6000	75	90	Yellow	6000	12000	8400	4800	6000
TP-WS-404	8000	100	120	Grey	8000	16000	11200	6400	8000
TP-WS-405	10000	125	150	Red	10000	20000	14000	8000	10000
TP-WS-406	12000	150	180	Brown	12000	24000	16800	9600	12000
TP-WS-408	16000	200	240	Blue	16000	32000	22400	12800	16000
TP-WS-410	20000	250	300	Orange	20000	40000	28000	16000	20000
TP-WS-412	24000	300	300	Orange	24000	48000	33600	19200	24000

www.t-lifting.com

WEBBING SLING


WEBBING SLING

Endless Flat Webbing Sling

1Ton - 12Ton

★ Specification:
- Material:100% High tenacity industrial polyester yarn
- Endless Type
- Length Available:0.5m to 12m
- Low elongation
- According to EN1492-1+A1:2008



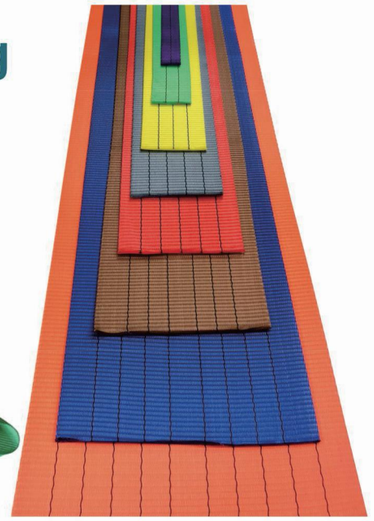

ART.NO.	W.L.L. (kg)	5:1&6:1 WIDTH (mm)	7:1&8:1 WIDTH (mm)	COLOR	WLL in kg at different modes				
					Straight lift	Basket lift	7°-45°	Choker hitch	45°-60°
TP-EWS-01	1000	25	30	Violet	1000	2000	1400	800	1000
TP-EWS-02	2000	50	60	Green	2000	4000	2800	1600	2000
TP-EWS-03	3000	75	90	Yellow	3000	6000	4200	2400	3000
TP-EWS-04	4000	100	120	Grey	4000	8000	5600	3200	4000
TP-EWS-05	5000	125	150	Red	5000	10000	7000	4000	5000
TP-EWS-06	6000	150	180	Brown	6000	12000	8400	4800	6000
TP-EWS-08	8000	200	240	Blue	8000	16000	11200	6400	8000
TP-EWS-10	10000	250	300	Orange	10000	20000	14000	8000	10000
TP-EWS-12	12000	300	300	Orange	12000	24000	16800	9600	12000



WEBBING SLING

Flat Webbing Sling With American Standard

3100Lbs - 28400Lbs

Safety factor 5:1

★ Specification:
- Material:100% High tenacity industrial polyester yarn
- Color: Yellow, etc.
- Ply: Single and Double
- Length Available: 3FT to 30FT
- Low elongation
- According to ASME B30.9-2006





Single Ply Flat Webbing Sling

ART.NO.	W.L.L. (lbs)	WIDTH (inch)	COLOR	WLL in lbs at different modes				
				Straight lift	Basket lift	7°-45°	Choker hitch	45°-60°
TP-AWS-101	1550	1	Yellow	1550	3100	2170	1240	1550
TP-AWS-102	3100	2	Yellow	3100	6200	4340	2480	3100
TP-AWS-103	4400	3	Yellow	4400	8800	6160	3520	4400
TP-AWS-104	5500	4	Yellow	5500	11000	7700	4400	5500
TP-AWS-105	6850	5	Yellow	6850	13700	9590	5480	6850
TP-AWS-106	8250	6	Yellow	8250	16500	11550	6600	8250
TP-AWS-108	11350	8	Yellow	11350	22700	15890	9080	11350
TP-AWS-110	14200	10	Yellow	14200	28400	19880	11360	14200



Double Ply Flat Webbing Sling

ART.NO.	W.L.L. (lbs)	WIDTH (inch)	COLOR	WLL in lbs at different modes				
				Straight lift	Basket lift	7°-45°	Choker hitch	45°-60°
TP-AWS-201	3100	1	Yellow	3100	6200	4340	2480	3100
TP-AWS-202	6200	2	Yellow	6200	12400	6860	4960	6200
TP-AWS-203	8800	3	Yellow	8800	17600	12320	7040	8800
TP-AWS-204	11000	4	Yellow	11000	22000	15400	8800	11000
TP-AWS-205	13700	5	Yellow	13700	27400	19180	10960	13700
TP-AWS-206	16500	6	Yellow	16500	33000	23100	13200	16500
TP-AWS-208	22700	8	Yellow	22700	45400	31780	18160	22700
TP-AWS-210	28400	10	Yellow	28400	56800	39760	22720	28400

WEBBING SLING

www.t-lifting.com

TP-LIFTING Round Sling

1Ton - 50Ton

EN 1492-2 : 2000+A1:2008

www.tuv.com
ID 1000000000

Round slings are manufactured to EN1492-2 and have a safety factor of 7:1. The load bearing fibers are wound together to form an endless hank. The working load limit is determined by the number of turns in the hank.

Round Sling are manufactured on a round sling machine. Slings made on this machine are more compact as the winding of the yarn is uniform and the tension on each yarn is constant

Advantages over Round Slings


Round Slings have a high strength to weight ratio.

Wears evenly along the length.

Load bearing fiber protected from the load, giving greater resistance to wear.

Remove slings from service when the outer cover is damaged and/or the yarn is exposed.

For More Information, Please Visit Us At
www.t-lifting.com

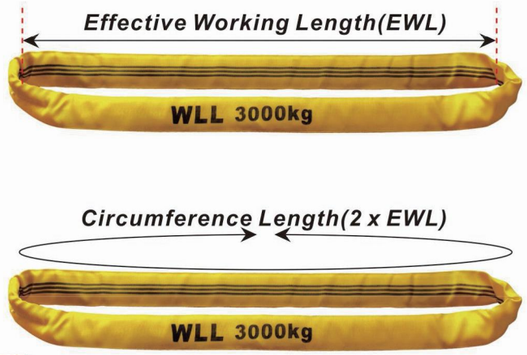



WEBBING SLING

Round Sling Safety Factor 7:1 According to EN1492-2

ART.NO.	W.L.L. (kg)	WIDTH (mm)	COLOR	WLL in kg at different modes				
				Straight lift	Basket lift	7°~45°	Choker hitch	45°~60°
TP-RS-01	1000	45	Violet	1000	2000	1400	800	1000
TP-RS-02	2000	50	Green	2000	4000	2800	1600	2000
TP-RS-03	3000	60	Yellow	3000	6000	4200	2400	3000
TP-RS-04	4000	75	Grey	4000	8000	5600	3200	4000
TP-RS-05	5000	85	Red	5000	10000	7000	4000	5000
TP-RS-06	6000	90	Brown	6000	12000	8400	4800	6000
TP-RS-08	8000	105	Blue	8000	16000	11200	6400	8000
TP-RS-10	10000	115	Orange	10000	20000	14000	8000	10000
TP-RS-12	12000	120	Orange	12000	24000	16800	9600	12000
TP-RS-15	15000	130	Orange	15000	30000	21000	12000	15000
TP-RS-20	20000	130	Orange	20000	40000	28000	16000	20000
TP-RS-25	25000	175	Orange	25000	50000	35000	20000	25000
TP-RS-30	30000	175	Orange	30000	60000	42000	24000	30000
TP-RS-40	40000	220	Orange	40000	80000	56000	32000	40000
TP-RS-50	50000	220	Orange	50000	100000	70000	40000	50000



WEBBING SLING

www.t-lifting.com

TOP LIFT

TP-LIFTING Ratchet Tie Down

400Kg - 10000Kg

EN 12195-2 : 2000

TÜV Rheinland ZERTIFIERT
www.tuv.com
ID 1000000000

GS geprüfte Sicherheit

CE

- The width of ratchet tie down produced by TOP LIFT is ranging from "1" to "4".
- Capacity is ranging from 400kg to 10000kg.
- Variety of colors can be customized by requirements.








RATCHET TIE DOWN

TP-LIFTING 1" Ratchet Tie Down


RATCHET-101


RATCHET-102


RATCHET-103


RATCHET-104

Double J Hook
800daN/1000daN/1500daN

S Hook
800daN/1000daN/1500daN

Model	Lashing Capacity	Webbing Width	Min.B.S	B.S of Webbing (Normal)	B.S of Webbing (EN12195-2)	Color	Ratchet Choice
TP-RTD-2501	400daN	25mm	800daN	1000daN	1200daN	Orange/Blue/Yellow/etc	Ratchet101 /102/ 103
TP-RTD-2502	500daN	25mm	1000daN	1250daN	1500daN	Orange/Blue/Yellow/etc	Ratchet101 /102/ 103
TP-RTD-2503	750daN	27mm	1500daN	1875daN	2250daN	Orange/Blue/Yellow/etc	Ratchet104

TP-LIFTING 1.5" Ratchet Tie Down


RATCHET-151


RATCHET-152


RATCHET-153


RATCHET-154

Double J Hook
2000daN/3000daN

Swan Hook
3000daN

Single J Hook
3000daN

Open Hook
2000daN

Model	Lashing Capacity	Webbing Width	Min.B.S	B.S of Webbing (Normal)	B.S of Webbing (EN12195-2)	No. of Black Strip	Color	Ratchet Choice
TP-RTD-3501	1000daN	35mm	2000daN	2500daN	3000daN	2	Orange/Blue/Yellow/etc	Ratchet151
TP-RTD-3502	1500daN	35mm	3000daN	3750daN	4500daN	3	Orange/Blue/Yellow/etc	Ratchet152 /153/ 154

RATCHET TIE DOWN

www.t-lifting.com

TP-LIFTING 2" Ratchet Tie Down


Ratchet-201
(2T Iron short Handle)

Ratchet-202
(Plastic Handle)



Ratchet-203
(Alu. Handle)


Ratchet-204
(Rubber Handle)



Ratchet-205
(Finger Handle)

Ratchet-206
(Ergo. Ratchet)





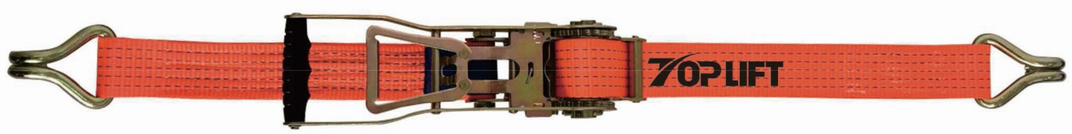


Double J Hook
2000/3000/4000/5000daN


Single J Hook
3000/5000daN


Open Hook
4000/5000daN


Triangle Ring
5000daN


Flat Hook
5000daN


E Fitting
2000daN


Rotate Hook
5000daN

Model	Lashing Capacity	Webbing Width	Min.B.S	B.S of Webbing (Normal)	B.S of Webbing (EN12195-2)	Color	Ratchet Choice
TP-RTD-5001	1000daN	50mm	2000daN	2500daN	3000daN	Orange/Blue/Yellow/etc	Ratchet201 /202/ 203
TP-RTD-5002	1500daN	50mm	3000daN	3750daN	4500daN	Orange/Blue/Yellow/etc	Ratchet202 /203
TP-RTD-5003	2000daN	50mm	4000daN	5000daN	6000daN	Orange/Blue/Yellow/etc	Ratchet202/203/204/205/206
TP-RTD-5004	2500daN	50mm	5000daN	6250daN	7500daN	Orange/Blue/Yellow/etc	Ratchet202/203/204/205/206

RATCHET TIE DOWN

TOP LIFT

TP-LIFTING 3" Ratchet Tie Down





Model	Lashing Capacity	Webbing Width	Min.B.S	B.S of Webbing (Normal)	B.S of Webbing (EN12195-2)	Color
TP-RTD-7501	4000daN	75mm	8000daN	10000daN	12000daN	Orange/Blue/Yellow/etc
TP-RTD-7502	5000daN	75mm	10000daN	12500daN	15000daN	Orange/Blue/Yellow/etc

TP-LIFTING 4" Ratchet Tie Down





Model	Lashing Capacity	Webbing Width	Min.B.S	B.S of Webbing (Normal)	B.S of Webbing (EN12195-2)	Color
TP-RTD-10001	4000daN	100mm	8000daN	10000daN	12000daN	Orange/Blue/Yellow/etc
TP-RTD-10002	5000daN	100mm	10000daN	12500daN	15000daN	Orange/Blue/Yellow/etc

RATCHET TIE DOWN

www.t-lifting.com

TP-LIFTING Ratchet Tie Down(AS/NZS)

1500Kg - 10000Kg

AS/NZS 4380:2001



Swan Hook

1"X1.5T / 1.5"X3T / 2"X5T / 3"X10T





AS/NZS 4380:2001 Standard Ratchet Tie Down

Model	Lashing Capacity	Webbing Width	Min.B.S	Hook	Color of Webbing	Color of Protector	Ratchet Choice
TP-RTD-AS01	750daN	27mm	1500daN	S Hook/Swan Hook	Blue	Yellow	Ratchet104
TP-RTD-AS02	1500daN	35mm	3000daN	Swan Hook	Blue	Yellow	Ratchet152/153/154
TP-RTD-AS03	2500daN	50mm	5000daN	Swan Hook	Blue	Yellow	Ratchet202/203/204/205
TP-RTD-AS04	5000daN	75mm	10000daN	Swan Hook	Blue	Yellow	Alu.Handle

RATCHET TIE DOWN

TOP LIFT

TP-LIFTING Ratchet Tie Down(WSTDA)

Working Load Limit: ***3333lbs*** *Breaking Load Limit:* ***10000lbs***

WSTDA-T-1



Ratchet-202 (Plastic Handle)



Ratchet-203 (Alu. Handle)



Ratchet-204 (Rubber Handle)



Ratchet-205 (Finger Handle)







Model:TP-RTD-US01

★ Specification

- Standard:WSTDA-T-1
- Width:2" (50mm)
- Working Load Limit:3333lbs
- Assembly Breaking Strength:10000lbs
- Webbing Breaking Strength:12500lbs
- Safety Factor: 3:1
- Webbing Color: Yellow/etc
- Ratchet:Ratchet202/203/204/205
- Normal Size: 2"x27' , 2"x30'



RATCHET TIE DOWN

www.t-lifting.com

TOPLIFT

TP-LIFTING Ratchet Tie Down(WSTDA)

Model:TP-RTD-US02

★ Specification

- Standard:WSTDA-T-1
- Width:2" (50mm)
- Working Load Limit:1500lbs
- Assembly Breaking Strength:4500lbs
- Webbing Breaking Strength:6000lbs
- Safety Factor: 3:1
- Webbing Color: Yellow/Grey/etc
- Ratchet:Ratchet201
- End Fitting: E-Fitting



Model:TP-RTD-US03

★ Specification

- Standard:WSTDA-T-1
- Width:2" (50mm)
- Working Load Limit:1000lbs
- Assembly Breaking Strength:3000lbs
- Webbing Breaking Strength:6000lbs
- Safety Factor: 3:1
- Webbing Color: Yellow/Grey/etc
- Ratchet: Cam Buckle
- End Fitting: E-Fitting



Model:TP-RTD-US04

★ Specification

- Standard:WSTDA-T-1
- Width:4" (100mm)
- Working Load Limit:5400lbs
- Assembly Breaking Strength:16200lbs
- Webbing Breaking Strength:20000lbs
- Safety Factor: 3:1
- Webbing Color: Yellow/etc
- Ratchet: Alu.Handle
- End Fitting: Double J Hook/Flat Hook/etc



www.t-lifting.com

RATCHET TIE DOWN

TOPLIFT

TP-LIFTING Ninjaline &Slackline













www.t-lifting.com

RATCHET TIE DOWN